



ViewTube™ Max View

INSTRUCTIONS



ViewTube™ Max View

INSTRUCTIONS




Congratulations on purchasing the **ViewTube™ Max View**, the latest and greatest innovation by Pipedream®. Intermittent Suction meets Ultra Suction, combining the best of both worlds! Experience the ultimate in automatic sucking action!

The new **ViewTube Max View** will let you see yourself like never before! Get ready for the most intense variable ultra suction & intermittent suction action you've ever experienced!

So what are you waiting for... Stick it in and view your cock magnified to the **MAX!**


Control Unit

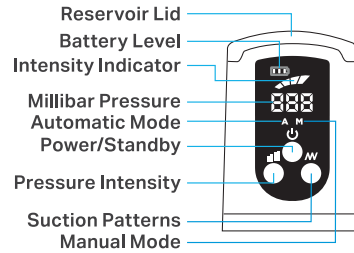

Standby Mode


Press and hold the power button for 3 seconds to enter standby mode.

Standby mode will turn off after 10 seconds of inactivity.



LED Pressure Indicators

Suction Intensity is displayed by LED lights on the pump head, indicating the pressure inside the tube in millibars (mbar).

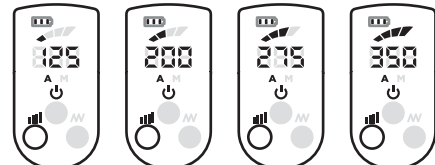

0-125 mbar	126-200 mbar	201-275 mbar	276-350 mbar
12.5 kPa 1.8 PSI	20.0 kPa 2.9 PSI	27.5 kPa 4.0 PSI	35.0 kPa 5.1 PSI
Green	Orange	Red	Blinking Red



4 Levels of Suction Intensity

Once in standby mode, press the **pressure intensity button** to start suction pressure at 125 mbar. Press the button again to cycle through the four suction intensities: 125/200/275/350 mbar. To **pause** the sucking action, press the **power button**. Press the power button again to release pressure. To **resume** sucking action, press the **intensity button**.



To **increase pressure**: Press the suction intensity button to adjust pressure to 4 different levels. Each press of the **intensity button** increases pressure by 75 millibars.

Switch between Automatic and Manual Modes

Simultaneously press and hold the **pressure intensity** and **suction pattern** buttons.



Intermittent Suction

- (A) Automatic - 4 Modes
 - (M) Manual - Personalized Control
- Press and release

Pressure Release/Quick Shutoff

Press and hold the **power button** to release pressure or hold **for 3 seconds** to turn off.

Care Instructions



Disassembly

To properly clean the ViewTube Max, thoroughly disassemble the unit by removing the control unit from the tube, then remove the cap and retaining ring which stays attached to the TPE stroker.

NOTE: The silicone O-Ring will detach from the tube opening and stay between the retaining ring and TPE stroker. The retaining ring will be very tight when removing. To remove the retaining ring, pull the retaining ring off the tube. Clean and dry all components before reassembly.

Charging

Ready when you are! Connect the included magnetic charging cord to a powered USB port, and the other end to the contacts on the back of the control unit.

Warning - Do not allow the charger magnets to attach to any metal surfaces while plugged into a powered USB port.



CHARGING INFO

	Charge Time	2.5 hrs
	Run Time	1.5 hrs
	Charger Type	Magnetic/USB A
	Pole Distance	6 mm
	Pole Diam.	3 mm

SUCTION PRESSURE CONVERSION CHART

mbar	125	200	275	350
kPa	12.5	20.0	27.5	35.0
PSI	1.8	2.9	4.0	5.1

PRODUCT DIMENSIONS

Total Length	12 in. (30.5 cm)
Max. Width	3.3 in. (8.4 cm)
Insertable Length	8 in. (20.3 cm)

Tube

Groove

Silicone O-Ring

TPE Stroker



NOTE:
Silicone O-Ring **MUST** seat within the groove for proper suction

(1 additional silicone O-Ring is provided as a spare)

Cleaning

Remove the TPE stroker and retaining ring from the pump tube. Clean the stroker and ring with antibacterial cleaner and warm water. Set aside and allow to air dry.

Remove the reservoir lid by sliding towards the back and clean any liquid.

Wipe off entire unit with a damp cloth and warm water. Set aside and allow all parts to air dry before reassembly and storage.

Reassembly

Reverse steps to reassemble components.

Replace reservoir lid. Reinstall control unit onto tube. Remove the silicone O-Ring from the retaining ring and place it around the groove on the tube. Place TPE with retaining ring into the opening of the tube.

Pro Tip

To easily reinstall the TPE stroker back into the tube, use the suction function of the unit to suck the stroker back into the tube. After placing the TPE stroker and retaining ring into the opening of the tube chamber, cover the orifice, and after pressing the power button on the control unit, press the pressure intensity button once to easily pull the stroker back into the tube.



Reservoir Lid

The ViewTube Max View vacuum suction pulls air and liquids through to the top.

The reservoir lid prevents liquids from spraying. Slide lid to access and clean.



WATCH ME IN ACTION!

Caution

Prolonged and frequent use of penis-enhancing devices may cause ruptured blood vessels, hemorrhage, and hematoma formation. This device can also aggravate existing medical conditions such as Peyronie's disease, priapism, and urethral stricture. Penis-enhancing devices are intended for adult use only.

©2024 Pipedream Products, LLC
Made in China. Colors May Vary. Sold As A Novelty Only.
Contains Sealed Lithium-Ion Rechargeable Battery. Batteries Must be Recycled.
Materials: ABS Plastic, Polycarbonate, & TPE



REGISTER YOUR PRODUCT TODAY for 1-YEAR warranty coverage!
pipedreamproducts.com/register